
SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AQ and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME			,	LICENSE NUMBER (or Affix Seal)		
1 MHN H	- KELLER	న		715#238	10	<u> </u>	
TITLE	/		COMPANY N	AME	1 4		
ONVERA	AND SURV	FOTOR	KEHN H	. Hellers	and a	SSOCIATI	35
ADDRESS		,	CITY			STATE	ZIP
9920	OTERO AV	enue (alarus	EPRINGS,		alers to	8006
SIGNATURE	ha # K	eilers		11-4-85	78	HONE 1-699-593	385 ·
Copies should	be made of this Ce	ertificate for: 1)	community offic	ial, 2) Insurance a	gent/compar	ny, and 3) buildin	g owner.
-							
COMMENTS: _							
			-				
	,	,					

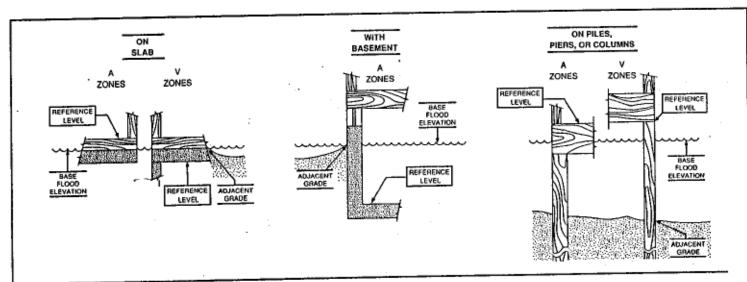

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.


Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B I understand that any false statement ma	y be punishable by fine	e or imprisonment under 18 U	S. Code, Section 1001	ANTAN .
Only a Fran	-1	PLS 272	70 \$0/2 %	10 8
CERTIFIER'S NAME		LICENSE NUMBER (or A	ix Seal) 27270	一
Owner	AOR a. d	Association	- FAI - EI EI O	123
TITLE		PANY NAME		180 1
1046 Norward	Au C.	lovado Springs	Colorada	<u> </u>
ADDRESS	CITY		W. STATE TO T	ZIP.
1 2 2 2		Jan 28, 1994	1-719-57 Tumber 12	
SIGNATURE		DATE	PHONE	
Copies should be made of this Certific	cate for: 1) community	official, 2) insurance agen	/company, and 3) building ow	ner.
COMMENTS:				
		· · · · · · · · · · · · · · · · · · ·		

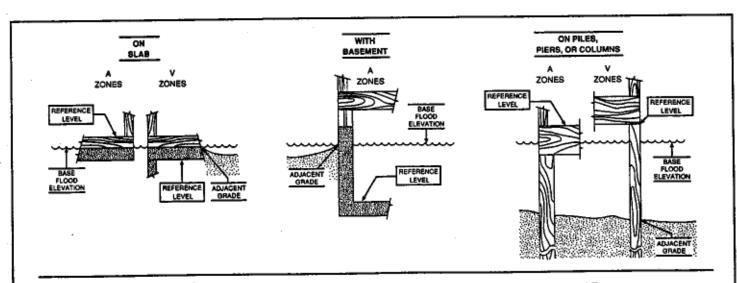

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.